


AQUA TURBO® FRMD/MIX-SL

Floatables removal device + submerged Mixer

Radial mixing in conjunction with surface flow generated by the submersible pump draws foam/scum towards the basin center.

A special adjustable scum weir allows a laminar layer of foam/scum to enter the pump intake for discharge from the basin. Non-contaminating so ideal for disposal and reuse applications.

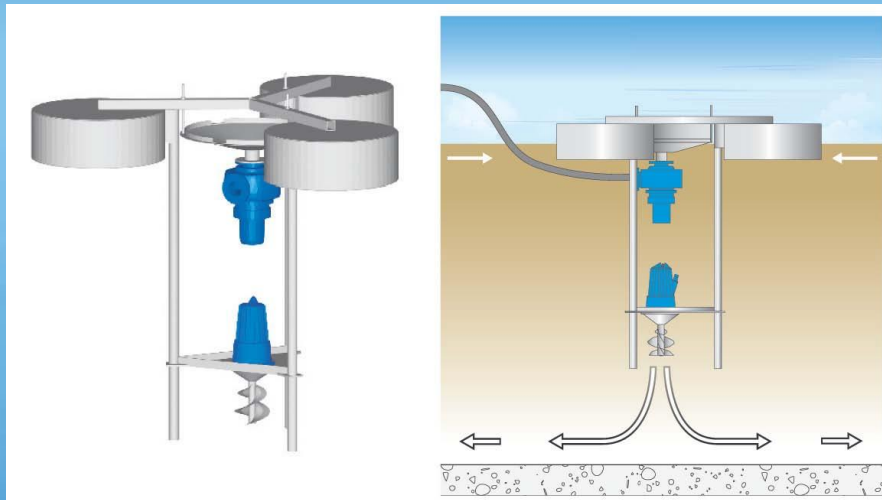

Applications :

Removal of bulking + old sludge
Removal + reuse of scum
Sludge stabilization + biogas
SBR

Features :

Adjustable flow rate
Purpose designed blockage free pump
Reliable + non-clogging impeller
Simple installation + removal

Range :

1.5 – 22kW EMOD motor - IP 68
4 + 6 Pole speeds, direct drive
Multiple pump flow rate options
AISI 304/316 or other SS

Configurations :

Float mount only
Vertical operation only
1 x Submerged drive + pump
Fixed or variable WL

Headquarters
AQUASYSTEMS INTERNATIONAL n.v.
Brusselsesteenweg 508 • B-1500Halle – Belgium
Tel.: +32/02 362 02 62 • Fax: +32/02 360 35 89
E-mail : asi@aquaturbo.be • <http://www.aquaturbo.be>

Subsidiary
AQUATURBO SYSTEMS INC. -USA



AQUASYSTEMS INTERNATIONAL n.v.
Sales Offices
UK • GERMANY • FRANCE

World-wide network of distributors and agents